


- 1) DUAL SKYPRO ARCHED DOMES
- 2) ALUM. DOME CAP
- 3) EXTERIOR MANUAL RELEASE SHOWN
- 4) G.I. STEEL SELF FLASHING BASE
- 5) EYEBOLT & PULLEY ASSEMBLY
- 6) LIFTING SHOCK
- 7) LATCH ASSEMBLY
- 8) OPEN EYE TURNBUCKLE
- 9) G.I. STEEL GUTTER

- 10) STRIKER ASSEMBLY
- 11) 1X4 WOOD NAILER
- 12) RIGID INSULATION
- 13) 0.060" 7 STRAND STEEL CABLE
- 14) EPDM BULB GASKET
- 15) G.I. STEEL DOME FRAME
- 16) FASTENERS @ 12"o.c. BY OTHERS
- 17) SET FRAME IN ROOFING MASTIC BY OTHERS

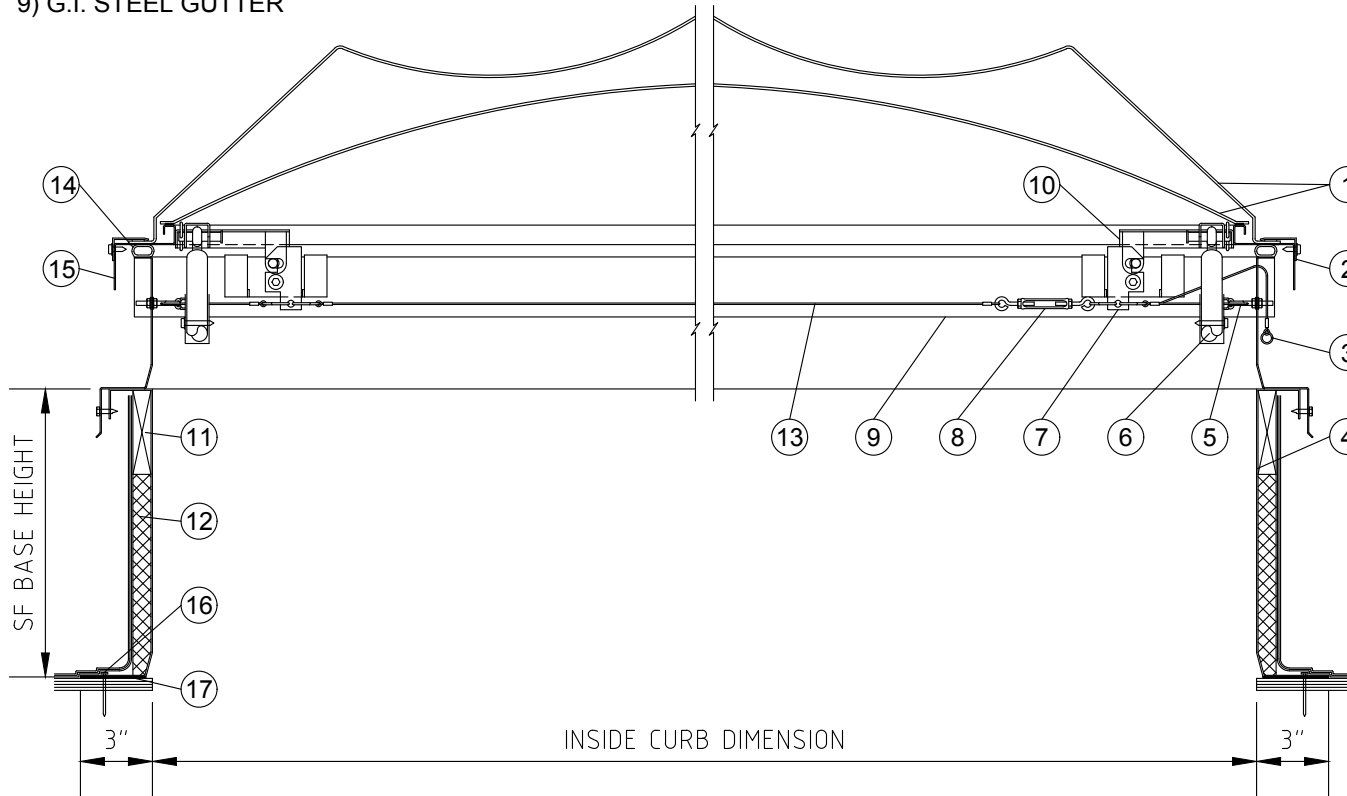

MODEL: S-ULSV-12SFICN-SPW/SPC-MF

SCALE : 1 1/2" = 1'-0"



COMPLIES WITH UL 793

SELF FLASHING BASE HEIGHT

- 4" SF BASE
- 9" SF BASE
- 12" SF BASE
- CUSTOM:

SKYCO

SKYLIGHTS

949-629-4090

FRAME FINISH

G90 GALVANIZED

FUSIBLE LINK TEMP. OPTIONS

- 165° UL/FM
- 212° UL/FM
- 286° UL/FM
- 370° UL/FM
- OTHER _____

MANUAL RELEASE OPTIONS

- INSIDE RELEASE
- OUTSIDE RELEASE
- BOTH

SKYPRO DUAL GLAZING


OUTER DOME

SKYPRO WHITE POLYCARBONATE (SPW)

INNER DOME

CLEAR COLORLESS POLYCARB. (SPC)

SKYPRO SKYWAVE DOME



PLAN VIEW



SIDE ELEVATION



END ELEVATION

MODEL	INSIDE CURB DIM.	QTY.
	SQUARE	
4848	48" x 48"	
	RECTANGULAR	
4896	48" x 96"	

UL LISTING #:	E472388	UL 10 PSF
---------------	---------	-----------

UL INSULATED SELF FLASHING STEEL FRAME SKYPRO SINGLE DOME DUAL LID SMOKE VENT

PROJECT:	PROJECT ADDRESS:	APPROVED BY:	DATE:
CUSTOMER:	CUSTOMER PHONE:	REV. #	JOB #
		DATE:	DRAWING #: